

DG500



ON-FARM

Programmable weight indicator for small and medium farms

GALLERY




FEATURES


DG500 specific features

- 24 Recipes, 18 components each (from a list of 48 components)
- 24 Distribution programs with 18 distribution point for each program (from a list of 48 distribution points)
- Service function with overload recorder and working time counter
- compatible with the DTM Daily TMR Manager Software Advanced Version
- Component consumption counter weight

TECHNICAL DATA



DISPLAY VISIBILITY
15 m and more (50 fit)




RANGE
0 – 999.999




INGRESS PROTECTION
IP 68 *




DISPLAY DIMENSIONS
45 mm (1.77 inches)




DISPLAY TYPE
LCD 6 digits (16 segments) +
Graphic display with
variable digits **




ACCURACY
< +/- 0.015% f.s.




POWER SUPPLY
9.5 – 32 Vdc




WEIGHT
UNIVERSAL CASE: 2,5 kg (5.5
lbs) SLIM CASE: 1,9 kg (4.2
lbs)




WORKING TEMPERATURE
-30 / +65°C (-22 / +150°F)(-
45°C / -49°F on request)



CASE DIMENSIONS
UNIVERSAL CASE:
220 x 205 x 110 mm
(8.7 x 8.0 x 4.4 inches)
SLIM CASE:
220 x 190 x 65 mm
(8.7 X 7.5 X 2.6 inches)



CASE MATERIAL
Specific Nylon with Glass
Fiber V0




RESOLUTION
1 – 2 – 5 – 10 – 20 – 50

* Complete protection from dust and water sprinklings, guaranteed in 1 meter of water full immersion with connectors closed by cap or with cables / accessories connected

** Perfect visibility in any weather condition (sunny, cloudy, rainy, snow)

Universal case:

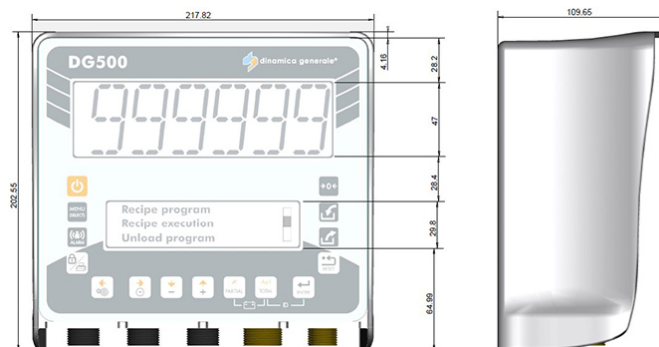

Slim case:

