

# DG600



ON-FARM

Programmable weight indicator for medium and large farms

## GALLERY



## FEATURES

### DG600 specific features

- 99 Recipes, 24 components each (from a list of 99 components)
- 48 distribution program with 48 distribution points for each program (from a list of 64 distribution points)
- Mixing time control
- Compatible with the DTM Daily TMR Manager Software Advanced version
- Wireless data exchange between indicator and DTM software via the 4G modem
- Versatile multilanguage interface

## TECHNICAL DATA



**DISPLAY VISIBILITY**  
15 m and more (50 fit)



**RANGE**  
0 – 999.999



**INGRESS PROTECTION**  
IP 68 \*



**DISPLAY DIMENSIONS**  
45 mm (1.77 inches)\*\*



**DISPLAY TYPE**  
LCD 6 digits (16 segments)  
+ Graphic display with  
variable digits \*\*



**ACCURACY**  
< +/- 0.015% f.s.



**POWER SUPPLY**  
9.5 – 32 Vdc



**WEIGHT**  
UNIVERSAL CASE: 2,5 kg (5.5  
lbs) SLIM CASE: 1,9 kg (4.2  
lbs)



**WORKING TEMPERATURE**  
-30 / +65°C (-22 / +150°F)(-  
45°C / -49°F on request)



**CASE DIMENSIONS**  
UNIVERSAL CASE:  
220 x 205 x 110 mm  
(8.7 x 8.0 x 4.4 inches)  
SLIM CASE:  
220 x 190 x 65 mm  
(8.7 X 7.5 X 2.6 inches)



**CASE MATERIAL**  
Specific Nylon with Glass  
Fiber V0




**RESOLUTION**  
1 - 2 - 5 - 10 - 20 - 50

\* Complete protection from dust and water sprinklings, guaranteed in 1 meter of water full immersion with connectors closed by cap or with cables / accessories connected

\*\* Perfect visibility in any weather condition (sunny, cloudy, rainy, snow)

### Universal case:

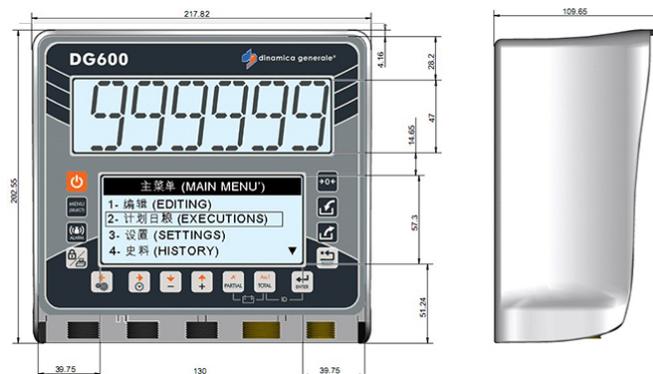

### Slim case:

